



Before using this unit, carefully read the sections entitled: "USING THE UNIT SAFELY" and "IMPORTANT NOTES" (supplied on a separate sheet). After reading, keep the document(s) where it will be available for immediate reference.

Main Features

- This is a WAZA CRAFT series effect pedal crafted with a high-quality analog original circuit design.
- The "Dimension" effect add unique natural spaciousness and rich depth to your sound.
- This pedal also reproduces the sound of "SDD-320 Dimension D" used by countless recording studios, providing a more sparkling sound.

Panel Descriptions

DC IN jack
In addition to 9-volt battery operation, this unit can also operate on a 9-volt AC adaptor (BOSS PSA series; sold separately).

- * Use only the specified AC adaptor (PSA series; sold separately), and connect it to an AC outlet of the correct voltage.
- * If the AC adaptor is connected while a battery is installed, the power supply is drawn from the AC adaptor.

CHECK indicator
This indicator shows whether the effect is ON/OFF, and also doubles as the battery check indicator. The indicator lights when the effect is ON.

- * The brightness of the CHECK indicator (LED) will dim as the battery lowers. Replace the battery when the LED is dim or does not light. For instructions, refer to "Changing the Battery."
- * The CHECK indicator shows whether the effect is being applied or not. It does not indicate whether the power to the device is on or not.

MODE SELECTOR [1]-[4] buttons
Select the sound. Higher numbers produce a deeper effect. By pressing two buttons simultaneously you can combine the effects.

S/SDD-320 switch
Switches the sound variation.

<input type="checkbox"/> SDD-320	Reproduces the sound of the original DC-2.
<input checked="" type="checkbox"/> S (Standard)	
<input type="checkbox"/> SDD-320	Reproduces a sparkling sound of the SDD-320.
<input checked="" type="checkbox"/> SDD-320	

OUTPUT A (MONO) jack
Outputs the effect sound in mono.

INPUT jack
Connect the output of your electric guitar, electronic musical instrument, or effect unit to this jack.

- * The INPUT A (MONO) jack doubles as the power switch. Power to the unit is turned on when you plug into the INPUT A (MONO) jack; the power is turned off when the cable is unplugged. To prevent unnecessary battery consumption, be sure to disconnect the plug from the INPUT A (MONO) jack when not using the effects unit.

OUTPUT B jack
Use this jack for stereo output. By using this in conjunction with the OUTPUT A (MONO) jack you can obtain spacious sound.


Thumbscrew
When this screw is loosened, the pedal will open, allowing you to change the battery.

- * For instructions on changing the battery, refer to "Changing the Battery."


Pedal switch
This switch turns the effect on/off.

OUTPUT Jacks

Mono output

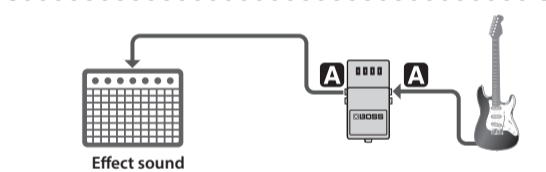

Stereo output

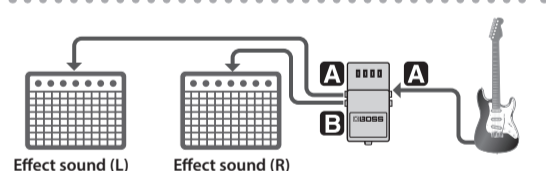

MEMO

The audio output of this unit does not support mono mix (stereo input / mono output). To obtain the optimal Dimension effect, we recommend that you use the unit with stereo output.

Precautions When Connecting


- To prevent malfunction and equipment failure, always turn down the volume, and turn off all the units before making any connections.
- Once everything is properly connected, be sure to follow the procedure below to turn on their power. If you turn on equipment in the wrong order, you risk causing malfunction or equipment failure.
 - When powering up:** Turn on the power to your guitar amp last.
 - When powering down:** Turn off the power to your guitar amp first.
- Before turning the unit on/off, always be sure to turn the volume down. Even with the volume turned down, you might hear some sound when switching the unit on/off. However, this is normal and does not indicate a malfunction.

Use of Battery

- The life of the included battery may be limited as its primary purpose was for testing during assembly.
- If you handle batteries improperly, you risk explosion and fluid leakage. Make sure that you carefully observe all of the items related to batteries that are listed in "USING THE UNIT SAFELY" and "IMPORTANT NOTES" (supplied on a separate sheet).
- When operating on battery power only, the unit's indicator will become dim when battery power gets too low. Replace the battery as soon as possible.
- Batteries should always be installed or replaced before connecting any other devices. This way, you can prevent malfunction and damage.
- If operating this unit on battery, please use alkaline battery.

Changing the Battery

- Hold down the pedal and loosen the thumbscrew, then open the pedal upward.
 - * The pedal can be opened without detaching the thumbscrew completely.
- Remove the old battery from the battery housing, and remove the snap cord connected to it.
- Connect the snap cord to the new battery, and place the battery inside the battery housing.
 - * Be sure to carefully observe the battery's polarity (+ versus -).
- Slip the coil spring onto the spring base on the back of the pedal, and then close the pedal.
 - * Carefully avoid getting the snap cord caught in the pedal, coil spring, and battery housing.
- Finally, hold down the pedal while tightening the thumbscrew into the guide bush hole.



Specifications

BOSS DC-2W: Dimension C	
Nominal Input Level	-20 dBu
Input Impedance	2.2 MΩ
Nominal Output Level	-20 dBu
Output Impedance	1 kΩ
Recommended Load Impedance	10 kΩ or greater
Power Supply	DC 9V: Alkaline battery (9V, 6LR61), AC adaptor (sold separately)
Current Draw	65 mA * Expected battery life under continuous use: Alkaline battery: Approx. 6 hours These figures will vary depending on the actual conditions of use.
Dimensions	73 (W) x 129 (D) x 59 (H) mm 2-7/8 (W) x 5-1/8 (D) x 2-3/8 (H) inches
Weight (including battery)	450 g 1 lb
Accessories	Owner's Manual, Leaflet ("USING THE UNIT SAFELY"/"IMPORTANT NOTES" and "Information"), Alkaline battery (9V, 6LR61)
Option (sold separately)	AC adaptor (PSA series)

* 0 dBu = 0.775 Vrms

Intellectual Property Right

- This document explains the specifications of the product at the time that the document was issued. For the latest information, refer to the Roland website.
- Roland, BOSS, and 技 WAZA CRAFT are either registered trademarks or trademarks of Roland Corporation in the United States and/or other countries.
- CMSIS-RTOS RTX Version 4.70.1
Copyright (c) 1999-2009 KEIL, 2009-2015 ARM Germany GmbH
All rights reserved.
Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:
 - Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
 - Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
 - Neither the name of ARM nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL COPYRIGHT HOLDERS AND CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

For the USA

SUPPLIER'S DECLARATION OF CONFORMITY
Compliance Information Statement

Model Name : DC-2W
 Type of Equipment : Guitar Effects
 Responsible Party : Roland Corporation U.S.
 Address : 5100 S. Eastern Avenue Los Angeles, CA 90040-2938
 Telephone : (323) 890-3700