

# WIRELESS GO II™ TX

TRANSMITTER FOR THE WIRELESS GO II

The Wireless GO II TX is an extremely versatile and ultra-compact wireless transmitter that's perfect for interviews, filmmaking and a wide range of content creation. Simply clip it onto your talent and record with the high-quality built-in microphone, or attach to a belt or boom arm and run a lavalier into the 3.5mm analog input. You can capture over 40 hours of on-board recordings on the transmitter itself, or transmit the audio via RØDE's cutting-edge Series IV 2.4GHz wireless transmission with up to 200m (line of sight) range.

**Note:** This product requires a RØDE Series IV RX (receiver) to operate, such as the Wireless GO II RX, Wireless ME RX, RØDECaster Pro II, RØDECaster Duo or Streamer X.

- Versatile wireless transmitter for the RØDE Series IV wireless system
- Series IV 2.4GHz digital transmission, 128-bit encryptions
- High-quality, built-in omnidirectional microphone
- On-board recording – over 40 hours of internal memory
- 3.5mm TRS analog input for connecting lavalier and VideoMics
- In-built rechargeable lithium-ion battery – up to 7 hours battery life
- 200m transmission range (line-of-sight)
- Requires a RØDE Series IV receiver to operate (including Wireless GO II RX, Wireless ME RX, RØDECaster Pro II, RØDECaster Duo or Streamer X)



WORKS WITH RØDE  
SERIES IV WIRELESS  
RECEIVERS



FREE RØDE VIDEO  
& AUDIO APPS



## ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Pre-polarised pressure transducer
Polar Pattern:	Omnidirectional
Frequency Range:	50Hz – 20kHz
Maximum SPL (Mic):	100 dB SPL (1kHz @ 1m)
Maximum Input Level (3.5mm):	-20dBV
Microphone Preamp Gain:	20dB
Equivalent Noise Level:	22dBA (A-weighted)
Bit Depth:	24-bit
Sample Rate:	48 kHz
Power Requirements:	In-built rechargeable lithium-ion battery charged via USB 5V, 0.3A
Operating Time:	Up to 7 hours
Analog Inputs:	3.5mm TRS (lavalier microphone input)
Transmission Range:	200m (line-of-sight)
Connectivity:	USB-C
Operating System Requirements:	macOS 10.11 and above Windows 10 and above iOS 14 Android 11

## MECHANICAL SPECIFICATIONS

Weight (grams):	30
Dimensions (millimetres):	Length: 44 Width: 45.3 Height: 18.3
Included Accessories:	2 x Furry Windshields 1 x SC22, 30cm USB-C to USB-C cable
RØDE Software Compatibility:	RØDE Central RØDE Connect RØDE Reporter RØDE Capture

## WHATS IN THE BOX



Wireless GO II  
Transmitter (TX)





Furry Windshields




SC22

## DIMENSIONS

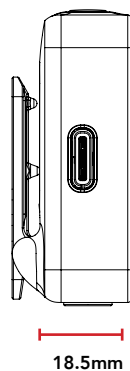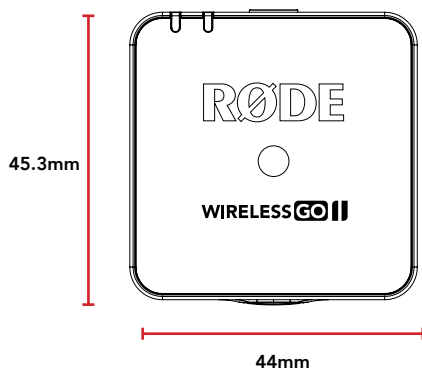

## POLAR PATTERN

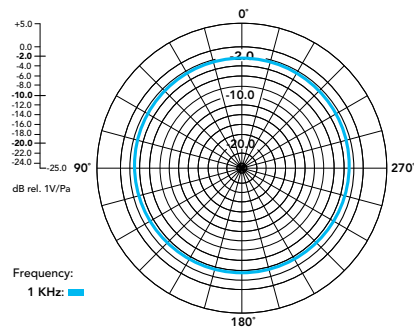

## FREQUENCY RESPONSE

