


ABS SPHERICAL LOUDSPEAKERS

- **GB20/T**
- **GB20/TC**



INSTALLATION INSTRUCTIONS

Side View
unit: mm

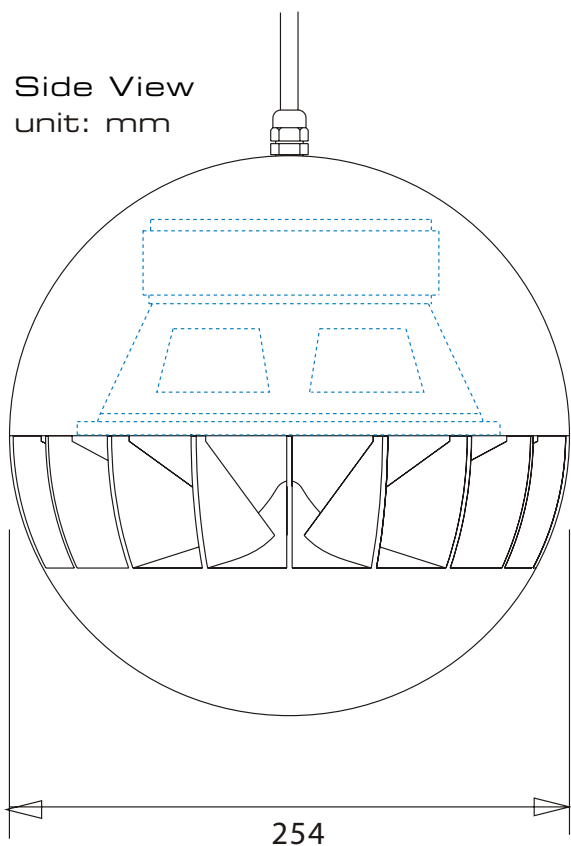

➤ STEP 1

You will observe that this loudspeaker is pendant hung, with the 5 strand braided cable (GB20/T) being used for hanging as well as for selecting the volume required (watts).

The GB20/TC version, used for voice alarm systems, is cabled with fire retardant cable as specified by you our customer and as such the colours cannot be determined until the cable type has been determined.

The cable colour identification will be marked on the loudspeaker when known.


➤ STEP 2

To select the volume a tapping label can be found at the top of the loudspeaker, matching cable colours to watts. You can select from 20 watts down to 2.25 watts. To change the tapping, select the appropriate colour (black is always common) and connect accordingly.

➤ STEP 3


The unit is secured to the ceiling/eaves into a junction box (not provided) with the braid of the cable being used as an anchoring point. It is important that the anchoring is adhered to at all times as it would be dangerous not to

GB20/T Circuit diagram 100V Common

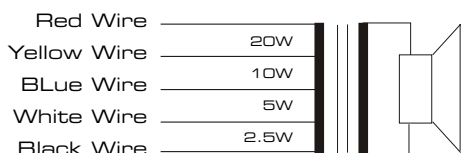

Plus braid used as anchoring point

GB20/TC Circuit diagram 100V Common

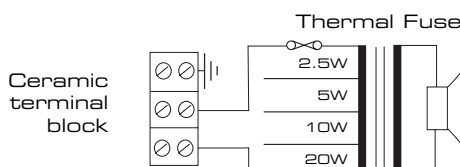

Penton UK Ltd

Unit 2 Teville Industrials | Dominion Way | Worthing | West Sussex | BN14 8NW
T: +44 (0)1903 215315 | F: +44(0)1903 215415 | E: sales@pentonuk.co.uk

www.pentonuk.co.uk

NOVEMBER 2011



RoHS

